

Simply highest-efficient module technology


Topcon Solar Technology

Made in India

132 HC G12R GG Bifacial


KEY FEATURES

- **High Power Output:** 610W – 630 W power output
- **Superior Efficiency:** Module efficiency up to 23.30%
- **Advanced Technology:** Featuring TOPCon Solar cell technology
- **Bifacial Design:** Glass-to-glass module for increased energy
- **Positive Power Tolerance:** 0~+5W output tolerance
- **Long-term Reliability:** 30 years power output warranty >87.4%
- **Cost-Effective:** Lower Levelized Cost of Energy (LCOE)
- **Temperature Performance:** Excellent temperature coefficient for higher efficiency in various conditions
- **Manufactured in India:** Solar modules proudly made in India

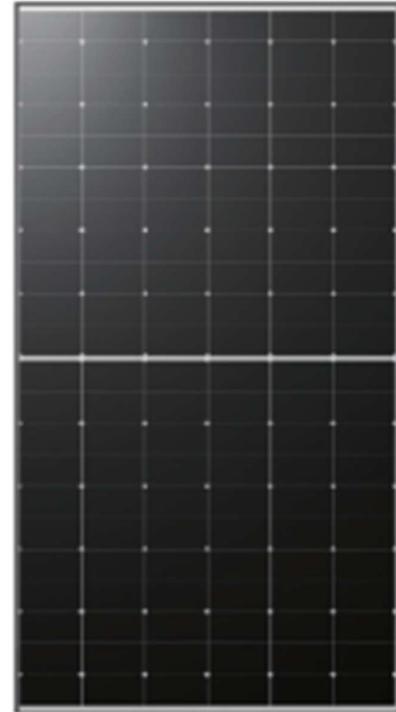

PERFORMANCE WARRANTIES

- **Unmatched Warranty:** Offering an industry-leading product and performance warranty of 30 years and 12 years product warranty.
- **Quality Assurance:** This exceptional extension underscores a commitment to quality, supported by state-of-the-art manufacturing standards that ensure superior durability and performance. 100% EL inspection ensuring defect free modules.
- **Minimal Degradation:** Thanks to advanced n-type solar TOPCon cells with resistance to LID and LeTID, our solar modules boast an impressive first-year degradation rate of just 1% and an annual degradation rate of only 0.4% thereafter.

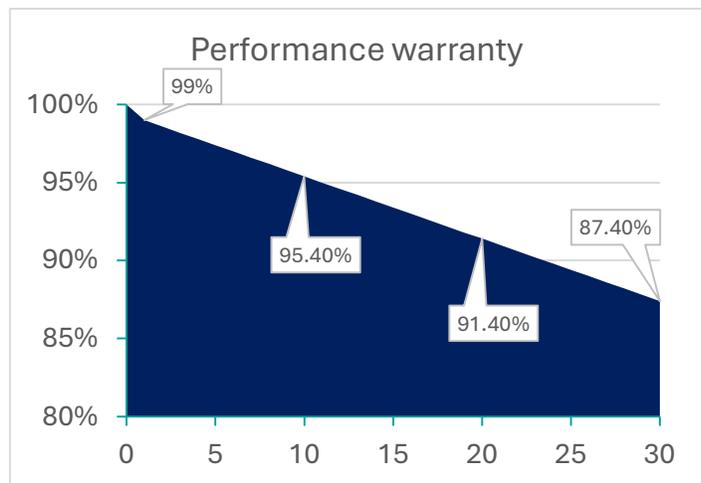


Simply highest-efficient module technology

Topcon Solar Technology

Made in India

132 HC G12R GG Bifacial

Electrical properties: Front side @STC					
Peak power P _{mpp} (W)	610	615	620	625	630
V _{mpp} (V)	41,96	42,30	42,64	42,99	43,33
I _{mpp} (A)	14,694	14,815	14,935	15,056	15,176
V _{oc} (V)	48,77	49,17	49,57	49,97	50,37
I _{sc} (A)	15,946	16,076	16,207	16,338	16,468
Module efficiency (%)	22,6%	22,8%	23,0%	23,1%	23,3%

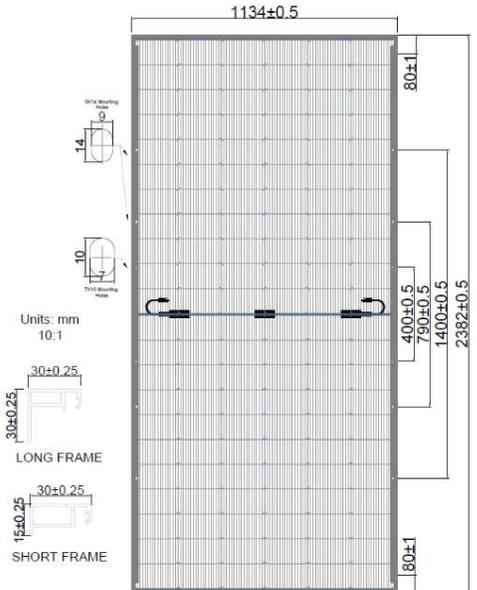

Bifacial Power Output						
Module Type		610	615	620	625	630
+10% (BNPI)	P _{mpp} (W)	671	677	682	688	693
+20%	P _{mpp} (W)	732	738	744	750	756
+30%	P _{mpp} (W)	793	800	806	813	819

STC: 1000 W/m², AM 1.5, Cell 25°C; BNPI: front 1000 W/m², rear 135 W/m²

Except P_{mpp}, all other parameters have tolerance of ± 3%. Measurement uncertainty <3%

Mechanical properties					
Cells	Cell type	Mono-crystalline, n-type TOPCon	Mounting	Mounting holes	8pcs, 9mm diameter and 14mm long
	Amount	132 half cells		Position	700mm, and 395mm from center
Module mechanical data	Dimension	2382 mm x 1134 mm x 30 mm	Junction box	Design	3-split, IP68
	Front and rear cover	2 mm heat-strengthened glass		Cable	300mm length and can be customized
	Encapsulant	EPE /EVA		Connector	MC4/MC4 compatible
	Weight	34 kg			

System properties	
Operating temperature	-40 to +80°C
Maximum system voltage	1500 V DC (IEC)
Maximum series fuse rating	35 A
Power tolerance	0 to +5W
Fire rating (IEC 61730)	Class C
Appliance class (IEC 61140)	II
Maximum mechanical load (static)	-2400 Pa / +5400 Pa

Temperature coefficient	
Temp. coefficient of P _{max}	-0.30%/K
Temp. coefficient of V _{oc} (V)	-0.25 %/K
Temp. coefficient of I _{sc} (A)	0.045 %/K
Nominal operating cell temperature (NOCT)	45 ± 2 °C

QUALIFICATIONS AND CERTIFICATIONS *

- IEC 61215 / IEC 61730
- IS 14286 / IS 61730
- ISO 14001
- ISO 9001
- ISO 45001



*Certification in process

PACKAGING CONFIGURATION

- Module per pallet: 36 pieces,
- Module per 40'HQ container: 20 pallets, 720

RPSG reserves the right to modify the specifications and features outlined in this datasheet at any time without prior notice.